




DARK EMPERADOR

MÁRMOL / MARBLE

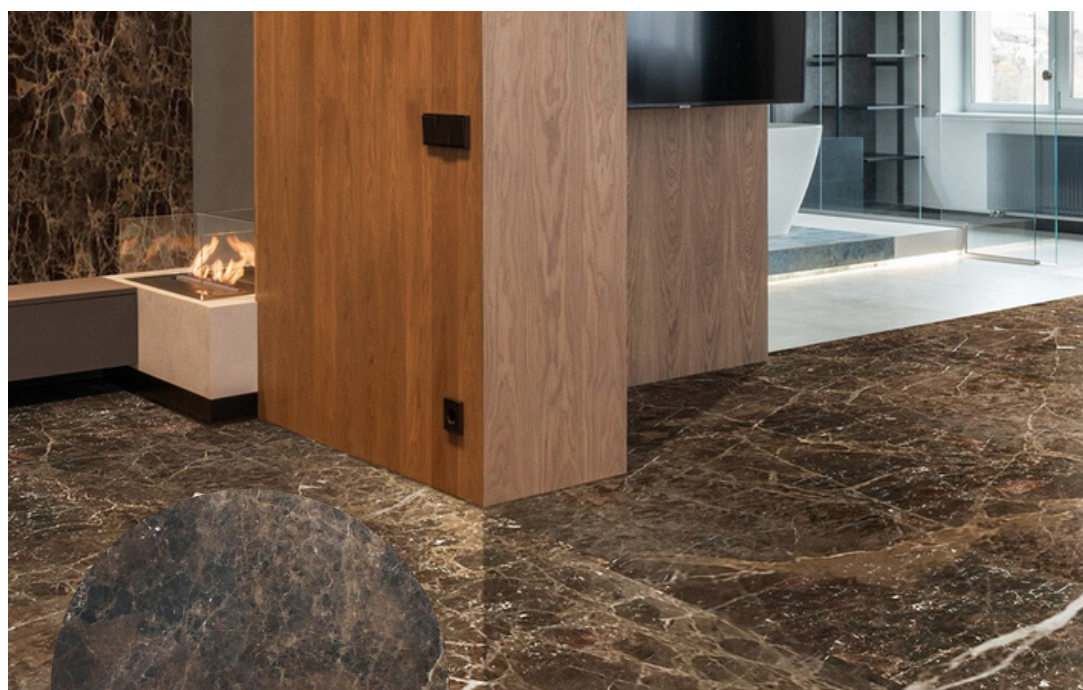

PULYCORT

Others try the impossible, but we achieve it

Descripción / Description

Roca marmórea, compacta de grano fino, con vetas blancas, brechoide, de disposición irregular.

Marble rock, compact, fine-grained, with white veins, brecciated, in irregular composition.

Acabados / Finishes

Pulido, apomazado, envejecido, arenado, granallado, abujardado y bruto.

Polished, honed, riverwashed, sandblasted, bush-hammered and rough.

Formatos / Formats

Bloques, tabla, losa y plaqueta.

Blocks, slabs, tiles and cut to size.

Aplicaciones / Applications

Interiores y exteriores.

Interiors and exteriors.

Características Features	Método de ensayo Test Method	Valor Declarado Declared value
Denominación petrográfica Petrographic denomination	UNE-EN 12407	Dolomía mesocrystalina brechoide Brecciated mesocrystalline dolostono
Densidad aparente [Kg/m3] Apparent density [Kg/m3]	UNE-EN 1936	2664 ± 40
Disminución de la resistencia a la flexión después de 48 ciclos hielo-deshielo [%] Decreasing of flexural strength after 48 cycles frost-taw [%]	UNE-EN 12371 2002	13
Absorción de agua a presión atmosférica [%] Water absorption by atmospheric pressure [%]	UNE-EN 13755	0,05 ± 0,02
Resistencia a la abrasión (mm) Abrasion resistance (mm)	UNE-EN 14157	20,5 ± 0,5
Permeabilidad al vapor de agua [μ] Permeability to the water steam [μ]	UNE-EN 12524	200/250
Resistencia a la flexión [MPa] Flexural strength [MPa]	UNE-EN 12372	
Valor medio [MPa] / Mean value [MPa]		15,7
Desviación estándar [MPa] / Standard deviation [MPa]		2,9
Valor mínimo esperado [MPa] / Low expected value [MPa]		11,4
Resistencia al deslizamiento Slip resistance	UNE-EN 14231 2004	
Acabado superficial bruto (SRV) / Rough surface finish (SRV)		50 ± 3
Reacción al fuego Fire reaction	Decisión Comisión Committee decision 96/603/EC	Clase A ₁ Class A ₁